

FACTSHEET FOR PARTNERSHIP FIELD VALIDATION TEST

Partnership Name	West Coast Regional Carbon Sequestration Partnership (WESTCARB)		
Contacts: DOE/NETL Project Mgr.	Name Dawn Deel	Organization Environmental Projects Division	E-Mail Dawn.Deel@NETL.DOE.gov
Principal Investigators	Terry Surles Larry R. Myer	Hawaii Natural Energy Institute California Energy Commission	surles@hawaii.edu LRMyer@lbl.gov
Field Test Information: Field Test Name	Integrated Oxy-Combustion CO ₂ Capture and Large-Volume Storage Test in a California Central Valley Saline Formation (WESTCARB Phase III)		
Test Location	Kern County, California		
Amount and Source of CO ₂	Tons: 1,000,000	Source: Clean Energy Systems' Oxy-Fuel Combustion (ZEPP-1) Power Plant	
Field Test Partners (Primary Sponsors)	California Energy Commission		
	Clean Energy Systems, Inc. (CES)		
	Schlumberger		

Summary of Field Test Site and Operations:

The WESTCARB Partnership will inject 250,000 tons of CO₂ per year for four years into a San Joaquin Basin saline formation about 8000 feet (2400 meters) beneath a new Clean Energy Systems' oxy-combustion power plant (the CO₂ source) being built at the Kimberlina Test Facility in Kern County, California. The plant site (see photo at right) consists of flat, open terrain surrounded by almond orchards, a fruit processing plant, and California Highway 99. It is currently home to Clean Energy Systems' 5 MW oxy-combustion pilot plant—which has been the host for oxy-combustion R&D sponsored by DOE and the California Energy Commission.



Proposed site of Clean Energy Systems' oxy-combustion power plant and WESTCARB large-volume CO₂ storage test


Current plans call for the new 50 MW plant (designated "Zero Emission Power Plant 1," or ZEPP-1) and associated CO₂ clean-up, compression, and injection systems to be built alongside the existing pilot plant. The ZEPP-1 unit is projected to come online in 2011. In preparation for large-volume injection operations (which will constitute the ZEPP-1 plant's entire exhaust, not a slipstream), WESTCARB will, in 2010, inject small quantities of commercially acquired CO₂ to verify injectivity and other subsurface characteristics important to the design of the large-volume test. For the large-volume injection test itself, short runs of above-grade process piping will transfer CO₂ from the ZEPP-1 plant to the injection wellhead.

The clean-up cycle within the ZEPP-1 plant will result in a gas stream with a CO₂ concentration of 96% or greater. Clean Energy Systems will deliver CO₂ to WESTCARB at approximately 1725 psig (119 barg). A booster pump will be used, if needed, to achieve injection into the target

saline formation(s). Schlumberger will manage injection operations, and will partner with Lawrence Berkeley National Laboratory (lead science organization) on data acquisition, interpretation, and analysis.

Lawrence Livermore National Laboratory has built a preliminary layered geomodel framework for the Kimberlina site as part of WESTCARB Phase II, based on the limited amount of available data. Early in Phase III, WESTCARB intends to conduct a three-dimensional seismic survey to provide higher confidence data for modeling.

There are two sandstone units of primary interest—the Olcese and the Vedder. The Olcese, at a depth of about 8000 feet (2400 meters), is a regionally continuous, fluvial-estuarine unit of moderate injectivity. Its thickness at the site is up to 800 feet (240 meters). The Vedder, at a depth of 9000 feet (2700 meters), is also regionally continuous. At the site is a braided stream unit with a thickness up to 500 feet (150 meters). Thick shale units provide good overlying seals at the site and surrounding areas.

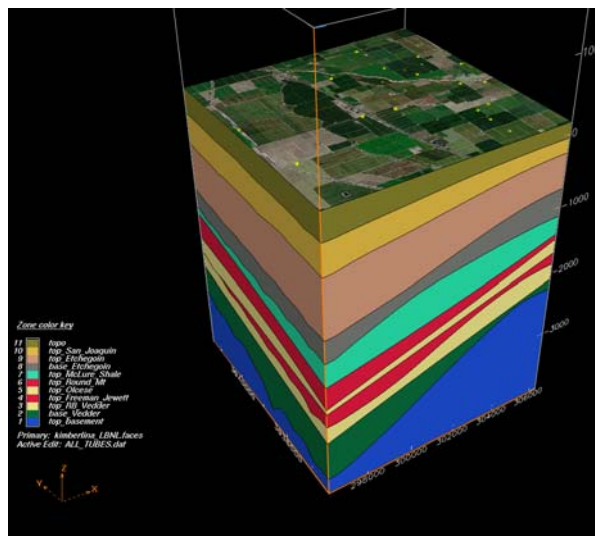

Initial geomodel of WESTCARB Phase III large-volume CO₂ storage test site in San Joaquin Basin below the Kimberlina site

Research Objectives:

1. Gain a more thorough understanding of the science, technology, and operations associated with the injection of a substantial amount of CO₂ into a saline formation, and broaden our knowledge of the storage capacity and the injectivity and storativity of CO₂ in saline formations.
2. Demonstrate secure geologic storage in a saline formation concurrent with CO₂ capture operations of a power plant.
3. Conduct a thorough site characterization to provide useful information, not only for this project but for establishing policy and procedures by which private and public entities may subsequently pursue commercial CO₂ sequestration activities.
4. Field-test new or refined monitoring and modeling techniques and systems to accurately determine the amount of CO₂ being stored and its subsurface location. Conduct surface monitoring to detect any leakage during the injection process and after its conclusion. Results will be crucial to the development of future measuring and monitoring protocols for assuring public safety and satisfying policy and market requirements for carbon storage verification.
5. Gain experience in permitting a CO₂ injection and storage operation and interact with appropriate government and regulatory agencies to help define the regulations and policies for geologic carbon sequestration projects.

- Develop outreach and educational tools to engage the public, stakeholders, and policymakers by communicating the benefits of long-term geologic carbon sequestration in helping to curb global climate change.

The complete integrated package of results from the large-volume sequestration test at Kimberlina (modeling, monitoring, validation, evaluation, technology development, permitting, operations and maintenance, and public outreach) will serve as a model for future projects of this kind and will help set the stage for additional research and policy development.

Summary of Modeling and MMV Efforts:


WESTCARB's monitoring program will be carried out in three phases, in conjunction with the characterization and test activities at the site.

During the *pre-operational phase*, emphasis will be on support of geologic characterization, baseline data acquisition, and assessment of environmental, health and safety risks. A considerable amount of testing and coring will be conducted as the injection well is drilled. An initial vertical seismic profile (VSP) test will be conducted to optimize placement of transmitters and receivers for the three-dimensional seismic test. Small-scale injection tests of CO₂ and/or water will be conducted to help understand storage processes and optimize injection operations.

During the *operational phase* of the project, CO₂ will be injected into the reservoir (for four years); surface facilities and injection rates will be monitored; the location of the plume will be tracked (via walk-away VSP tests); and modeling activities will be conducted.

The *post-injection phase* of the project will be used as a confirmatory period to detect continued movement of the plume, detect any potential leakage, and to assess if the storage project is performing as expected.

Computer simulation using the models ECLIPSE, TOUGH2, and TOUGHREACT will be used to predict plume migration and the effectiveness of solubility, residual gas (capillary), and mineral trapping. During operations, comparisons between simulated and monitored plume migration will be used to refine and calibrate the model and to update forecasts of plume migration. During the post-operational phase, a similar approach will be used to predict post-injection plume behavior—with a primary focus on quantifying the secondary trapping mechanisms that will eventually immobilize the CO₂ plume.

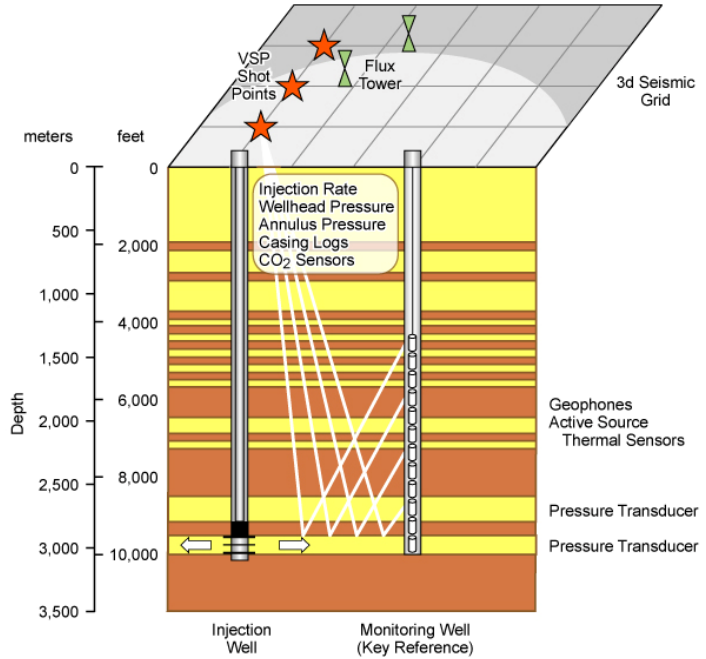

WESTCARB Phase III proposed approach to surface and subsurface monitoring

Table 1. Measurement Technologies Evaluated for Potential Use in the LVST

Measurement Technique	Measurement Parameters	Application
Well logs and cores	Brine salinity Sonic velocity CO ₂ saturation	Provide baseline data and estimates of permeability and porosity Track CO ₂ movement Track brine migration Check condition of well casing and cement
Formation, wellhead, and annulus pressure	Pressure readings	Verify injection equipment is performing as expected (no leaks) Keep injection rate from going too high
Injection rate monitoring	Flow rate measurements	Accurately account for the mass of CO ₂ injected into the storage formation
Seismic Surveys (3D and VSP)	P and S wave velocity Reflection horizons Seismic amplitude attenuation	Detect detailed distribution of CO ₂ in the storage formation Detect leakage through any faults and fractures
Atmospheric CO ₂ monitoring	CO ₂ concentrations measured at wellheads	Detect potentially unsafe conditions during injection
CO ₂ flux monitoring	CO ₂ fluxes between the land surface and atmosphere	Detect, locate, and quantify any CO ₂ releases
Pressure and water quality above the storage formation	Establish baselines prior to injection. If pressure data indicate leakage, collect formation water samples for additional data and verification.	Detect leakage of CO ₂ or brine out of the storage reservoir
PSINSAR	Surface displacement	Areal extent of CO ₂ plume

Accomplishments to Date:

Planning and coordination meetings with project partners have been held to address critical path activities during the first two years, notably the NEPA and California Environmental Quality Act (CEQA) processes; permitting; public outreach; data acquisition for the site characterization, modeling, and simulation; and subcontracting.

Summarize Target Sink Storage Opportunities and Benefits to the Region:

The Great Central Valley province is an elongated topographic valley approximately 450 miles (720 kilometers) long, extending from the Klamath Mountains in the north to the Transverse Ranges in the south, and lying between the Sierra Nevada and the Coast Ranges. The Great

Central Valley consists of a large depositional basin that has received sediments almost continuously since the late Jurassic and contains, by some estimates, as much as 40,000 feet (12,000 meters) of mostly marine, sedimentary rocks (Magoon and Valin, 1995). In the subsurface, the Great Central Valley is divided into the Sacramento Basin in the north and the San Joaquin Basin to the south, the point of division being the buried Stockton Arch south of the Stockton city limits.

The San Joaquin Basin extends about 220 miles (350 kilometers) from the Stockton Arch to its southern terminus at the northern Transverse Ranges and averages 50–70 miles (80–110 kilometers) wide. It is bounded on the east by the Sierra Nevada and on the west by the Central Coast Ranges and the San Andreas Fault. The target formations are the Olcese or Vedder Sandstones. Basin porosities range from 10-40% and permeabilities from 0.2 millidarcies to 10,000 millidarcies. Porosity and permeability decrease with depth. Hydrocarbon traps in this area are partly structural, as a result of mild folding throughout the Great Central Valley, but mostly as a result of large-scale facies variations.


Favorable attributes of the San Joaquin Basin include: (1) geographic diversity; (2) thick sedimentary fill with multiple porous and permeable aquifers and hydrocarbon reservoirs; (3) thick, laterally persistent marine shale seals; (4) locally abundant geological, petrophysical, and fluid data from oil and gas operations; and (5) numerous abandoned or mature oil and gas fields that might be reactivated for CO₂ sequestration or benefit from CO₂-enhanced recovery operations.

<p>Cost:</p> <p style="text-align: center;">Total Field Project Cost: \$90,719,100</p> <p>DOE Share: \$67,000,000 73.9%</p> <p>Non-DOE Share: \$23,719,100 26.1%</p>	<p>Field Project Key Dates: Proposed Schedule</p> <p>Baseline Completed: 2010 (interim data earlier)</p> <p>Drilling Operations Begin: 2009–2010</p> <p>Injection Operations Begin: 2011</p> <p>MMV Events: Initial Models – Fall 2008</p>
--	---

Field Test Schedule and Milestones (Gantt Chart):

**WESTCARB Phase III—Kimberlina Large Volume Sequestration Test
Project Schedule**

Years are federal fiscal years, October through September

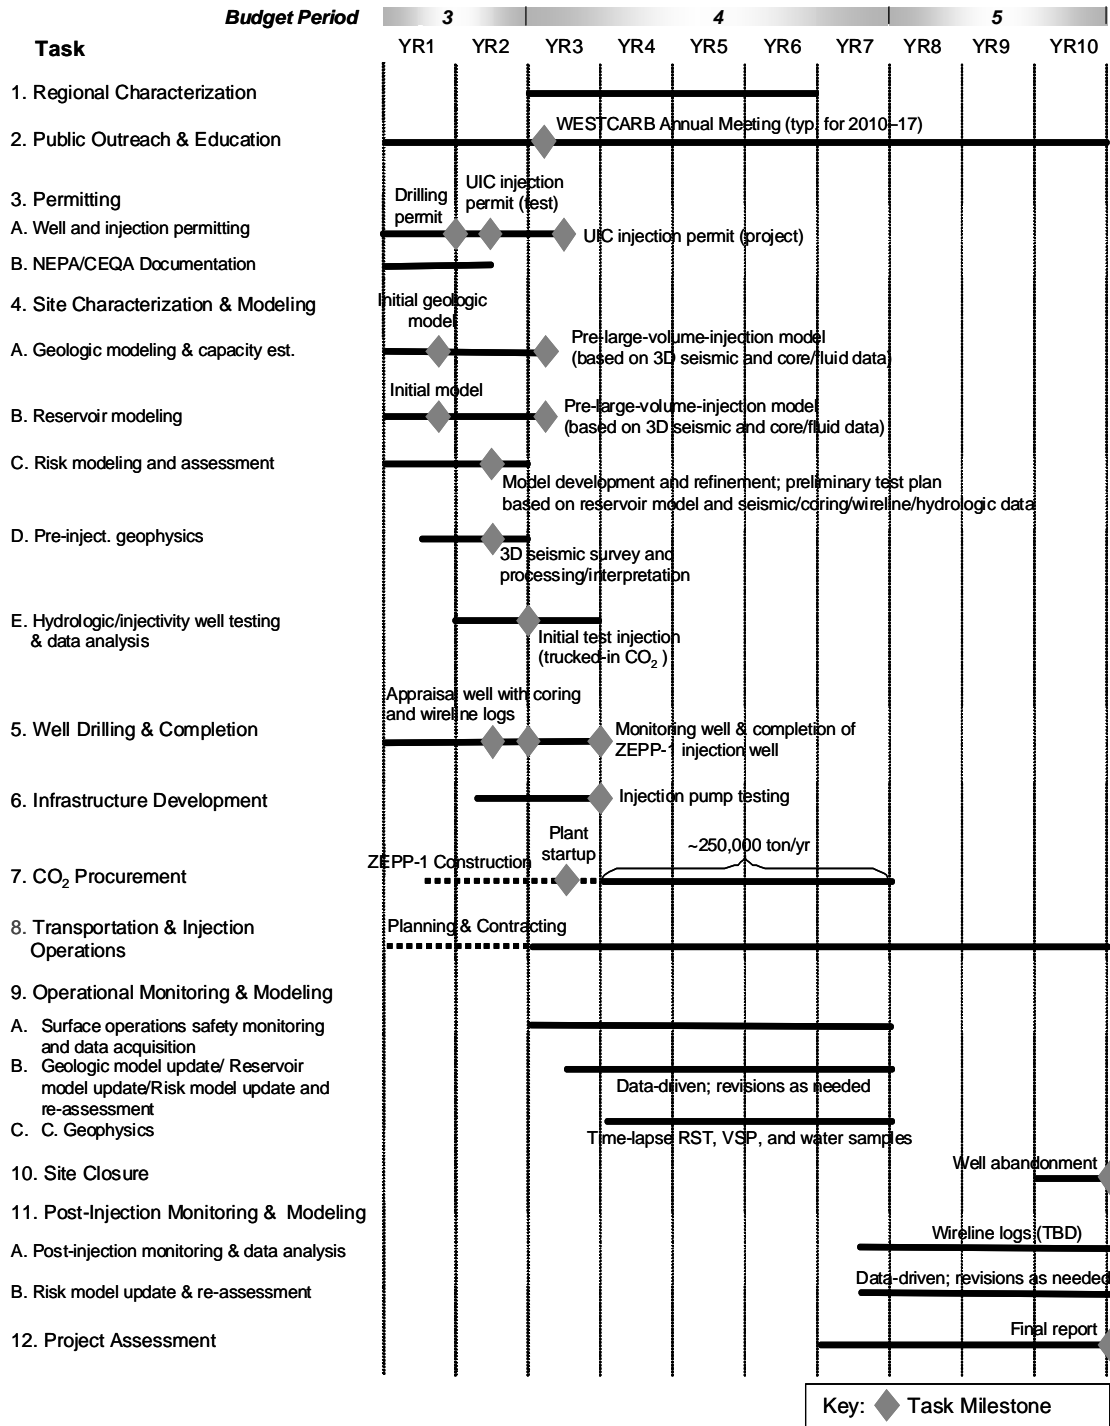

Additional Information

Intentionally blank.